



INDUSTRIAL LIGHTING



IP 67

Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Protection class IP	Temperature range °C	No. of FIXING CLIPS
LED-T0250-12MD	Polycarbonate	0.25m	24V DC	3,9 W	550 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2
LED-T0500-12MD	Polycarbonate	0.5m	24V DC	7,7 W	1100 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2
LED-T1000-12MD	Polycarbonate	1m	24V DC	15,4 W	2200 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2
LED-T2000-12MD	Polycarbonate	2m	24V DC	30,7 W	4400 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2



IP 67

Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Protection class IP	Temperature range °C	No. of FIXING CLIPS
LED-12FD-T0250-12MD	Polycarbonate	0.25m	24V DC	3,9 W	550 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2
LED-12FD-T0500-12MD	Polycarbonate	0.5m	24V DC	7,7 W	1100 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2
LED-12FD-T1000-12MD	Polycarbonate	1m	24V DC	15,4 W	2200 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2
LED-12FD-T2000-12MD	Polycarbonate	2m	24V DC	30,7 W	4400 Lm	6000K Pure White	IP67	-25°C / +60°C	No.2



IP 54

Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Protection class IP	Temperature range °C	No. of FIXING CLIPS
LED-P0250-12MD	Polycarbonate	0.25m	24V DC	3,9 W	450 Lm	4500K Pure White	IP54	-25°C / +60°C	No.2
LED-P0500-12MD	Polycarbonate	0.5m	24V DC	7,7 W	900 Lm	4500K Pure White	IP54	-25°C / +60°C	No.3
LED-P1000-12MD	Polycarbonate	1m	24V DC	15,4 W	1800 Lm	4500K Pure White	IP54	-25°C / +60°C	No.4
LED-P2000-12MD	Polycarbonate	2m	24V DC	30,7 W	3600 Lm	4500K Pure White	IP54	-25°C / +60°C	No.6

INDUSTRIAL LIGHTING
IP67 / IP54 LED LIGHT TUBE



IP 54

Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Protection class IP	Temperature range °C	No. of FIXING CLIPS
LED-12FD-P0250-12MD	Polycarbonate	0.25m	24V DC	3,9 W	450 Lm	4500K Pure White	IP54	-25°C / +60°C	No.2
LED-12FD-P0500-12MD	Polycarbonate	0.5m	24V DC	7,7 W	900 Lm	4500K Pure White	IP54	-25°C / +60°C	No.3
LED-12FD-P1000-12MD	Polycarbonate	1m	24V DC	15,4 W	1800 Lm	4500K Pure White	IP54	-25°C / +60°C	No.4
LED-12FD-P2000-12MD	Polycarbonate	2m	24V DC	30,7 W	3600 Lm	4500K Pure White	IP54	-25°C / +60°C	No.6



IP 67


Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Protection class IP	Temperature range °C	No. of FIXING CLIPS
LED-G0250-12MD	Borosilicate Glass	0.25m	24V DC	3,9 W	450 Lm	4500K Pure White	IP67	-25°C / +60°C	No.2
LED-G0500-12MD	Borosilicate Glass	0.5m	24V DC	7,7 W	900 Lm	4500K Pure White	IP67	-25°C / +60°C	No.3
LED-G1000-12MD	Borosilicate Glass	1m	24V DC	15,4 W	1800 Lm	4500K Pure White	IP67	-25°C / +60°C	No.4
LED-G2000-12MD	Borosilicate Glass	2m	24V DC	30,7 W	3600 Lm	4500K Pure White	IP67	-25°C / +60°C	No.6



IP 67

Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Protection class IP	Temperature range °C	No. of FIXING CLIPS
LED-12FD-G0250-12MD	Borosilicate Glass	0.25m	24V DC	3,9 W	450 Lm	4500K Pure White	IP67	-25°C / +60°C	No.2
LED-12FD-G0500-12MD	Borosilicate Glass	0.5m	24V DC	7,7 W	900 Lm	4500K Pure White	IP67	-25°C / +60°C	No.3
LED-12FD-G1000-12MD	Borosilicate Glass	1m	24V DC	15,4 W	1800 Lm	4500K Pure White	IP67	-25°C / +60°C	No.4
LED-12FD-G2000-12MD	Borosilicate Glass	2m	24V DC	30,7 W	3600 Lm	4500K Pure White	IP67	-25°C / +60°C	No.6

• **LED LIGHT TUBE WITH CABLE:**

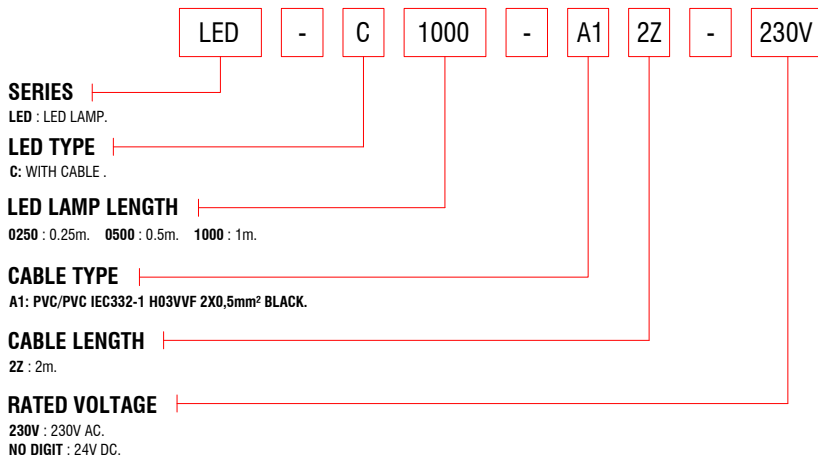

Code	Material	Lighting Length	Rated Voltage	Rated Power	Luminous flux	Lighting colour	Temperature range °C	No. of FIXING CLIPS	Cable type	Cable length
LED-C0250-A12Z	Polycarbonate	0.25m	24V DC	3,9 W	450 Lm	4500K Pure White	-25°C / +60°C	No.2	PVC IEC332-1 H05VVF BLACK	2m
LED-C0500-A12Z	Polycarbonate	0.5m	24V DC	7,7 W	900 Lm	4500K Pure White	-25°C / +60°C	No.3	PVC IEC332-1 H05VVF BLACK	2m
LED-C1000-A12Z	Polycarbonate	1m	24V DC	15,4 W	1800 Lm	4500K Pure White	-25°C / +60°C	No.4	PVC IEC332-1 H05VVF BLACK	2m
LED-C2000-A12Z	Polycarbonate	2m	24V DC	15,4 W	1800 Lm	4500K Pure White	-25°C / +60°C	No.6	PVC IEC332-1 H05VVF BLACK	2m



Code	Material	Lighting Length	Rated Voltage	Rated Power	Lighting colour	Temperature range °C	No. of FIXING CLIPS	Cable type	Cable length
LED-C0250-A12Z-230V	Polycarbonate	0.25m	230V AC	5 W	4500K Pure White	-25°C / +60°C	No.2	PVC IEC332-1 H05VVF BLACK	2m
LED-C0500-A12Z-230V	Polycarbonate	0.5m	230V AC	8 W	4500K Pure White	-25°C / +60°C	No.2	PVC IEC332-1 H05VVF BLACK	2m
LED-C1000-A12Z-230V	Polycarbonate	1m	230V AC	16 W	4500K Pure White	-25°C / +60°C	No.2	PVC IEC332-1 H05VVF BLACK	2m

TUBULAR LAMPS NOTE:

1. For the 24V DC LED lights it is possible to supply tubular lamps with different lengths required by the customer; our tubular lamps are composed of 6 LED segments L ~80mm, therefore you can add or remove 6 LED segments.

2. For the 230V AC LED lamps it is possible to provide only tubular lamps with standard dimensions 250/500/1000mm

3. Upon request the LED Lights can be supplied with different types of cable and different cable lengths.

For any further information please contact us.



• GENERAL FEATURES OF INDUSTRIAL CIRCULAR LIGHTING:

Lighting material :
 PC Windows.
 Aluminium housing.

Fixing system :
 M30x1.5 Fixing nut.

Type of terminations :
 M12 Male plug.

Max. screw torque IEC60947-1
 M12 coupling nut torque 0.4 N*m

M12 material :
 Coupling nut: Brass+Nickel plated.
 Internal core: PA66.
 Contacts: Brass + Gold flash.

Protection class :
 IP 67.

Storage temperature :
 -40°C +70°C
 -20°C +50°C HUMIDITY 90%

Rated current:
 12/18 V : 0.208A
 24 V : 0.104A
 30/36 V : 0.83A

Operating voltage:
 ø 50mm : 18-30 V DC
 ø 64mm : 18-30 V DC

Rated Power:
 ø 50mm : 2.5 W
 ø 64mm : 4.2 W



Light colour:
 6000K Cool White.

Lumens(25°C):
 ø 50mm : 200Lm
 ø 64mm : 330Lm

Life Time:
 After 50000 hour light decay less than 30%.



Packaging:
 1piece / box.

LED-50-12MD

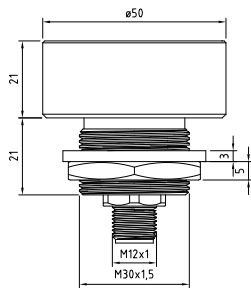

LED-50-12MD

LED-64-12MD

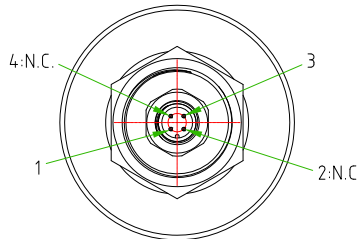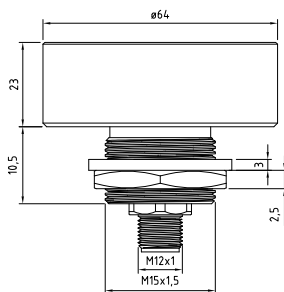

LED-64-12MD

• ACCESSORIES:



Code	Description	Cable length	PACKAGING
LED-PS-EU-12FD	Feeder EUROPEAN connection + M12 female connector	1.8m	1piece / box
LED-PS-USA-12FD	Feeder AMERICAN connection + M12 female connector	1.8m	1piece / box
LED-PS-UL-12FD	Feeder (ULappr.-only feeder)with INTERCHANGEABLE connection (EU,UK,USA,JP,CN/AU) + M12 female connector	1.7m	1piece / box